

Izdelek / Product: **JUBIZOL UNIXIL FINISH S 1.5 / 2.0**



IZJAVA O LASTNOSTIH
DECLARATION OF PERFORMANCE
Št. / No. 001/19-UXG

1. **Enotna identifikacijska oznaka tipa proizvoda / Unique identification code of product**
10.02.37

2. **Predvidena uporaba / Intended use**

Siloksaniziran akrilni glajen omet za dekorativno zaščito fasadnih zidnih površin / Siloxane acrylic smooth render finish for decorative protection of facade walls

3. **Proizvajalec / Manufacturer**

JUB d.o.o.

Dol pri Ljubljani 28

SI-1262 Dol pri Ljubljani

Slovenia

www.jub.eu

4. **Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti / System of AVCP**

Sistem 3 / System 3

5. **Tehnična specifikacija / Technical specification**

EN 15824

6. **Navedene lastnosti / Declared performance**

Bistvene značilnosti / Characteristic	Lastnost / Declaration	Standard / Norm	Tehnična specifikacija / Technical specification
Odziv na ogenj / Reaction to fire	A2	EN 13501-1	EN 15824:2017
Sprijemna trdnost / Bond strength	> 0,3 MPa	EN 1542	EN 15824:2017
Toplotna prevodnost $\lambda_{10, \text{suh}}$ / Thermal conductivity $\lambda_{10, \text{dry}}$	0,83 W/mK, P=50%	EN 1745	EN 15824:2017



Paroprepusnost / Water vapour permeability	V2	EN ISO 7783-2	EN 15824:2017
Vpijanje vode / Water absorption	W3	EN 1062-3	EN 15824:2017
Trajnost / Durability	NPD	EN 13687-3	EN 15824:2017

7. **Proizvod je tudi komponenta zunanjega toplotnoizolacijskega sistema z ometom / Product is also component of external thermal insulation composite system with render**

JUBIZOL EPS, ETA-09/0393
JUBIZOL MW, ETA-10/0334
JUBIZOL PB EPS, ETA-13/0633
JUBIZOL PB MW, ETA-13/0632
JUBIZOL S70, ETA-08/0236
JUBIZOL XPS, ETA-07/0028

ZAG Ljubljana 1404-CPR-2792
ZAG Ljubljana 1404-CPR-2793
ZAG Ljubljana 1404-CPD-1985
ZAG Ljubljana 1404-CPD-1984
ZAG Ljubljana 1404-CPD-1332
ZAG Ljubljana 1404-CPR-2794

Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.


The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Podpisal za in v imenu proizvajalca / Signed for and on behalf of the manufacturer by:

Dol pri Ljubljani, 05.07.2019

Danijel Lisičić,

Vodja razvojnega področja / R&D manager

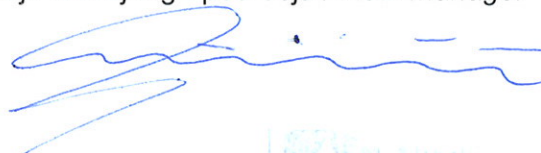



ZAG Ljubljana 1404

JUB d.o.o.
 Dol pri Ljubljani 28
 SI – 1262 Dol pri Ljubljani
 Slovenia
 11

Unique identification code of product: 10.02.37
 Declaration of performance No.: 001/19-UXG

EN 15824:2017

*Siloxane acrylic smooth render finish for decorative protection
 of facade walls*

Reaction to fire	A2
Bond strength	> 0,3 MPa
Thermal conductivity $\lambda_{10,dry}$	0,83 W/mK, P = 50% (value from EN 1745)
Water vapour permeability	V2
Water absorption	W3

